



182M HALF CELL

535W-550W



Outstanding mechanical load resistance

2400 Pa wind load, 5400 Pa snow load



Anti-PID(potential induced degradation)

Passed anti-PID test under 85% damp heat, 85% relative humidity for 96 hours




Great Durability against extreme conditions

Passed salt mist corrosion test, ammonia corrosion test, dust&sand test, fire test, all certified by TUV



Double electroluminescence (EL) tests

Carefully inspected before and after lamination to guarantee fault-free modules

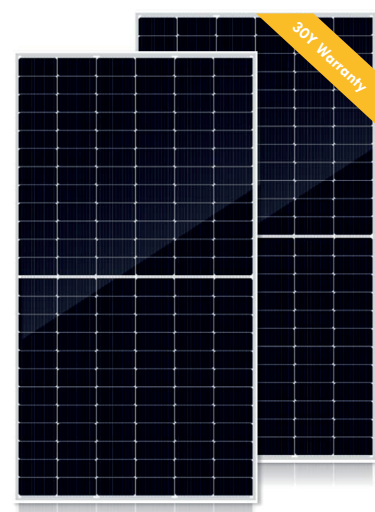

ELECTRICAL PERFORMANCE

Model Type	YH530W-36MH		YH540W-36MH		YH545W-36MH	
Dimensions (L / W / H)	2279×1134×35		2279×1134×35		2279×1134×35	
	STC	NOCT	STC	NOCT	STC	NOCT
Peak Power at STC (Pmax)	535	397.7	540	401.4	545	405.1
Maximum Power Voltage (Vmp)	41.60	38.62	41.76	38.78	41.93	38.93
Maximum Power Current (Imp)	12.84	10.30	12.93	10.35	13.00	10.41
Open Circuit Voltage (Voc)	49.5±3%	46.36±3%	49.7±3%	46.54±3%	49.9±3%	46.73±3%
Short Circuit Current (Isc)	13.61±3%	10.97±3%	13.72±3%	11.05±3%	13.81±3%	11.13±3%
Module Efficiency(%)	20.93		21.12		21.32	

THERMAL CHARACTERISTICS & OPERATING CONDITIONS

Maximum System Voltage(V)	1500/1000V
Maximum Series Fuse Rating(A)	20A
Power Tolerance	0~+3W
Pmax Temperature Coefficients(W/°C)	-0.400%
Voc Temperature Coefficients(V/°C)	-0.290%
Isc Temperature Coefficients(A/°C)	+0.048%
NOCT Nominal Operating Cell Temperature(°C)	45±2°C
Operating and Storage Temperature(°C)	-40°C~+85°C

CONSTRUCTION MATERIALS

Front Cover (Material / Thickness)	low-iron tempered glass / 3.2mm
Cell (Quantity/Type/Dimensions)	182*91 Mono
No. of Cells	144 (6*12)*2
Frame (Material)	Anodized Aluminium Alloy
Junction Box (Protection Degree)	IP67/IP68
Cable (Length/Cross-Sectional Area)	4mm² cable 30cm+mc4

PACKAGING SPECIFICATIONS

- 20FT container 10Packages/275PCS
- 40HQ container 22Packages/620PCS

